

NAG Fortran Library Routine Document

D03PLF

Note: before using this routine, please read the Users' Note for your implementation to check the interpretation of *bold italicised* terms and other implementation-dependent details.

1 Purpose

D03PLF integrates a system of linear or nonlinear convection-diffusion equations in one space dimension, with optional source terms and scope for coupled ordinary differential equations (ODEs). The system must be posed in conservative form. Convection terms are discretized using a sophisticated upwind scheme involving a user-supplied numerical flux function based on the solution of a Riemann problem at each mesh point. The method of lines is employed to reduce the partial differential equations (PDEs) to a system of ODEs, and the resulting system is solved using a backward differentiation formula (BDF) method or a Theta method.

2 Specification

```

SUBROUTINE D03PLF (NPDE, TS, TOUT, PDEDEF, NUMFLX, BNDARY, U, NPTS, X,
1 NCODE, ODEDEF, NXI, XI, NEQN, RTOL, ATOL, ITOL, NORM,
2 LAOPT, ALGOPT, RSAVE, LRSAVE, ISAVE, LISAVE, ITASK,
3 ITRACE, IND, IFAIL)

INTEGER NPDE, NPTS, NCODE, NXI, NEQN, ITOL, LRSAVE,
1 ISAVE (LISAVE), LISAVE, ITASK, ITRACE, IND, IFAIL
double precision TS, TOUT, U (NEQN), X (NPTS), XI (*), RTOL (*), ATOL (*),
1 ALGOPT (30), RSAVE (LRSAVE)
CHARACTER*1 NORM, LAOPT
EXTERNAL PDEDEF, NUMFLX, BNDARY, ODEDEF

```

3 Description

D03PLF integrates the system of convection-diffusion equations in conservative form:

$$\sum_{j=1}^{\text{NPDE}} P_{ij} \frac{\partial U_j}{\partial t} + \frac{\partial F_i}{\partial x} = C_i \frac{\partial D_i}{\partial x} + S_i, \quad (1)$$

or the hyperbolic convection-only system:

$$\frac{\partial U_i}{\partial t} + \frac{\partial F_i}{\partial x} = 0, \quad (2)$$

for $i = 1, 2, \dots, \text{NPDE}$, $a \leq x \leq b$, $t \geq t_0$, where the vector U is the set of PDE solution values

$$U(x, t) = \left[U_1(x, t), \dots, U_{\text{NPDE}}(x, t) \right]^T.$$

The optional coupled ODEs are of the general form

$$R_i(t, V, \dot{V}, \xi, U^*, U_x^*, U_i^*) = 0, \quad i = 1, 2, \dots, \text{NCODE}, \quad (3)$$

where the vector V is the set of ODE solution values

$$V(t) = \left[V_1(t), \dots, V_{\text{NCODE}}(t) \right]^T,$$

\dot{V} denotes its derivative with respect to time, and U_x is the spatial derivative of U .

In (1), P_{ij} , F_i and C_i depend on x , t , U and V ; D_i depends on x , t , U , U_x and V ; and S_i depends on x , t , U , V and **linearly** on \dot{V} . Note that P_{ij} , F_i , C_i and S_i must not depend on any space derivatives, and P_{ij} ,

F_i , C_i and D_i must not depend on any time derivatives. In terms of conservation laws, F_i , $\frac{C_i \partial D_i}{\partial x}$ and S_i are the convective flux, diffusion and source terms respectively.

In (3), ξ represents a vector of n_ξ spatial coupling points at which the ODEs are coupled to the PDEs. These points may or may not be equal to PDE spatial mesh points. U^* , U_x^* and U_t^* are the functions U , U_x and U_t evaluated at these coupling points. Each R_i may depend only linearly on time derivatives. Hence (3) may be written more precisely as

$$R = L - M\dot{V} - NU_t^*, \quad (4)$$

where $R = [R_1, \dots, R_{\text{NCODE}}]^T$, L is a vector of length NCODE, M is an NCODE by NCODE matrix, N is an NCODE by $(n_\xi \times \text{NPDE})$ matrix and the entries in L , M and N may depend on t , ξ , U^* , U_x^* and V . In practice you only need to supply a vector of information to define the ODEs and not the matrices L , M and N . (See Section 5 for the specification of the user-supplied (sub)program ODEDEF.)

The integration in time is from t_0 to t_{out} , over the space interval $a \leq x \leq b$, where $a = x_1$ and $b = x_{\text{NPPTS}}$ are the leftmost and rightmost points of a user-defined mesh $x_1, x_2, \dots, x_{\text{NPPTS}}$. The initial values of the functions $U(x, t)$ and $V(t)$ must be given at $t = t_0$.

The PDEs are approximated by a system of ODEs in time for the values of U_i at mesh points using a spatial discretization method similar to the central-difference scheme used in D03PCF/D03PCA, D03PHF/D03PHA and D03PPF/D03PPA, but with the flux F_i replaced by a *numerical flux*, which is a representation of the flux taking into account the direction of the flow of information at that point (i.e., the direction of the characteristics). Simple central differencing of the numerical flux then becomes a sophisticated upwind scheme in which the correct direction of upwinding is automatically achieved.

The numerical flux vector, \hat{F}_i say, must be calculated by you in terms of the *left* and *right* values of the solution vector U (denoted by U_L and U_R respectively), at each mid-point of the mesh $x_{j-\frac{1}{2}} = (x_{j-1} + x_j)/2$, for $j = 2, 3, \dots, \text{NPPTS}$. The left and right values are calculated by D03PLF from two adjacent mesh points using a standard upwind technique combined with a Van Leer slope-limiter (see LeVeque (1990)). The physically correct value for \hat{F}_i is derived from the solution of the Riemann problem given by

$$\frac{\partial U_i}{\partial t} + \frac{\partial F_i}{\partial y} = 0, \quad (5)$$

where $y = x - x_{j-\frac{1}{2}}$, i.e., $y = 0$ corresponds to $x = x_{j-\frac{1}{2}}$, with discontinuous initial values $U = U_L$ for $y < 0$ and $U = U_R$ for $y > 0$, using an *approximate Riemann solver*. This applies for either of the systems (1) or (2); the numerical flux is independent of the functions $P_{i,j}$, C_i , D_i and S_i . A description of several approximate Riemann solvers can be found in LeVeque (1990) and Berzins *et al.* (1989). Roe's scheme (see Roe (1981)) is perhaps the easiest to understand and use, and a brief summary follows. Consider the system of PDEs $U_t + F_x = 0$ or equivalently $U_t + AU_x = 0$. Provided the system is linear in U , i.e., the Jacobian matrix A does not depend on U , the numerical flux \hat{F} is given by

$$\hat{F} = \frac{1}{2}(F_L + F_R) - \frac{1}{2} \sum_{k=1}^{\text{NPDE}} \alpha_k |\lambda_k| e_k, \quad (6)$$

where F_L (F_R) is the flux F calculated at the left (right) value of U , denoted by U_L (U_R); the λ_k are the eigenvalues of A ; the e_k are the right eigenvectors of A ; and the α_k are defined by

$$U_R - U_L = \sum_{k=1}^{\text{NPDE}} \alpha_k e_k. \quad (7)$$

An example is given in Section 9 and in the D03PPF documentation.

If the system is nonlinear, Roe's scheme requires that a linearized Jacobian is found (see Roe (1981)).

The functions $P_{i,j}$, C_i , D_i and S_i (but **not** F_i) must be specified in a (sub)program PDEDEF supplied by you. The numerical flux \hat{F}_i must be supplied in a separate user-supplied (sub)program NUMFLX. For problems in the form (2), the actual argument D03PLP may be used for PDEDEF (D03PLP is included in

the NAG Fortran Library; however, its name may be implementation-dependent: see the Users' Note for your implementation for details). D03PLP sets the matrix with entries $P_{i,j}$ to the identity matrix, and the functions C_i , D_i and S_i to zero.

The boundary condition specification has sufficient flexibility to allow for different types of problems. For second-order problems, i.e., D_i depending on U_x , a boundary condition is required for each PDE at both boundaries for the problem to be well-posed. If there are no second-order terms present, then the continuous PDE problem generally requires exactly one boundary condition for each PDE, that is NPDE boundary conditions in total. However, in common with most discretization schemes for first-order problems, a *numerical boundary condition* is required at the other boundary for each PDE. In order to be consistent with the characteristic directions of the PDE system, the numerical boundary conditions must be derived from the solution inside the domain in some manner (see below). Both types of boundary condition must be supplied by you, i.e., a total of NPDE conditions at each boundary point.

The position of each boundary condition should be chosen with care. In simple terms, if information is flowing into the domain then a physical boundary condition is required at that boundary, and a numerical boundary condition is required at the other boundary. In many cases the boundary conditions are simple, e.g., for the linear advection equation. In general you should calculate the characteristics of the PDE system and specify a physical boundary condition for each of the characteristic variables associated with incoming characteristics, and a numerical boundary condition for each outgoing characteristic.

A common way of providing numerical boundary conditions is to extrapolate the characteristic variables from the inside of the domain (note that when using banded matrix algebra the fixed bandwidth means that only linear extrapolation is allowed, i.e., using information at just two interior points adjacent to the boundary). For problems in which the solution is known to be uniform (in space) towards a boundary during the period of integration then extrapolation is unnecessary; the numerical boundary condition can be supplied as the known solution at the boundary. Another method of supplying numerical boundary conditions involves the solution of the characteristic equations associated with the outgoing characteristics. Examples of both methods can be found in Section 9 and in the D03PFF documentation.

The boundary conditions must be specified in a user-supplied (sub)program BNDARY in the form

$$G_i^L(x, t, U, V, \dot{V}) = 0 \quad \text{at } x = a, \quad i = 1, 2, \dots, \text{NPDE}, \quad (8)$$

at the left-hand boundary, and

$$G_i^R(x, t, U, V, \dot{V}) = 0 \quad \text{at } x = b, \quad i = 1, 2, \dots, \text{NPDE}, \quad (9)$$

at the right-hand boundary.

Note that spatial derivatives at the boundary are not passed explicitly to the (sub)program BNDARY, but they can be calculated using values of U at and adjacent to the boundaries if required. However, it should be noted that instabilities may occur if such one-sided differencing opposes the characteristic direction at the boundary.

The algebraic-differential equation system which is defined by the functions R_i must be specified in a (sub)program ODEDEF supplied by you. You must also specify the coupling points ξ (if any) in the array XI.

The problem is subject to the following restrictions:

- (i) In (1), $\dot{V}_j(t)$, for $j = 1, 2, \dots, \text{NCODE}$, may only appear **linearly** in the functions S_i , for $i = 1, 2, \dots, \text{NPDE}$, with a similar restriction for G_i^L and G_i^R ;
- (ii) $P_{i,j}$, F_i , C_i and S_i must not depend on any space derivatives; and $P_{i,j}$, F_i , C_i and D_i must not depend on any time derivatives;
- (iii) $t_0 < t_{\text{out}}$, so that integration is in the forward direction;
- (iv) The evaluation of the terms $P_{i,j}$, C_i , D_i and S_i is done by calling the (sub)program PDEDEF at a point approximately midway between each pair of mesh points in turn. Any discontinuities in these functions **must** therefore be at one or more of the mesh points $x_1, x_2, \dots, x_{\text{NPTS}}$;
- (v) At least one of the functions $P_{i,j}$ must be non-zero so that there is a time derivative present in the PDE problem.

In total there are $NPDE \times NPTS + NCODE$ ODEs in the time direction. This system is then integrated forwards in time using a BDF or Theta method, optionally switching between Newton's method and functional iteration (see Berzins *et al.* (1989)).

For further details of the scheme, see Pennington and Berzins (1994) and the references therein.

4 References

Berzins M, Dew P M and Fuzeland R M (1989) Developing software for time-dependent problems using the method of lines and differential-algebraic integrators *Appl. Numer. Math.* **5** 375–397

Hirsch C (1990) *Numerical Computation of Internal and External Flows, Volume 2: Computational Methods for Inviscid and Viscous Flows* John Wiley

LeVeque R J (1990) *Numerical Methods for Conservation Laws* Birkhäuser Verlag

Pennington S V and Berzins M (1994) New NAG Library software for first-order partial differential equations *ACM Trans. Math. Softw.* **20** 63–99

Roe P L (1981) Approximate Riemann solvers, parameter vectors, and difference schemes *J. Comput. Phys.* **43** 357–372

Sod G A (1978) A survey of several finite difference methods for systems of nonlinear hyperbolic conservation laws *J. Comput. Phys.* **27** 1–31

5 Parameters

1: NPDE – INTEGER *Input*

On entry: the number of PDEs to be solved.

Constraint: $NPDE \geq 1$.

2: TS – *double precision* *Input/Output*

On entry: the initial value of the independent variable t .

On exit: the value of t corresponding to the solution values in U. Normally $TS = TOUT$.

Constraint: $TS < TOUT$.

3: TOUT – *double precision* *Input*

On entry: the final value of t to which the integration is to be carried out.

4: PDEDEF – SUBROUTINE, supplied by the user. *External Procedure*

PDEDEF must evaluate the functions $P_{i,j}$, C_i , D_i and S_i which partially define the system of PDEs. $P_{i,j}$ and C_i may depend on x , t , U and V ; D_i may depend on x , t , U , U_x and V ; and S_i may depend on x , t , U , V and linearly on \dot{V} . PDEDEF is called approximately midway between each pair of mesh points in turn by D03PLF. The actual argument D03PLP may be used for PDEDEF for problems in the form (2) (D03PLP is included in the NAG Fortran Library; however, its name may be implementation-dependent: see the Users' Note for your implementation for details).

Its specification is:

<pre> SUBROUTINE PDEDEF (NPDE, T, X, U, UX, NCODE, V, VDOT, P, C, D, S, 1 IRES) INTEGER NPDE, NCODE, IRES <i>double precision</i> T, X, U(NPDE), UX(NPDE), V(*), VDOT(*), 1 P(NPDE,NPDE), C(NPDE), D(NPDE), S(NPDE) 1: NPDE – INTEGER <i>Input</i> <i>On entry:</i> the number of PDEs in the system. </pre>

2:	T – <i>double precision</i> <i>On entry:</i> the current value of the independent variable t .	<i>Input</i>
3:	X – <i>double precision</i> <i>On entry:</i> the current value of the space variable x .	<i>Input</i>
4:	U(NPDE) – <i>double precision</i> array <i>On entry:</i> U(i) contains the value of the component $U_i(x, t)$, for $i = 1, 2, \dots, \text{NPDE}$.	<i>Input</i>
5:	UX(NPDE) – <i>double precision</i> array <i>On entry:</i> UX(i) contains the value of the component $\frac{\partial U_i(x, t)}{\partial x}$, for $i = 1, 2, \dots, \text{NPDE}$.	<i>Input</i>
6:	NCODE – INTEGER <i>On entry:</i> the number of coupled ODEs in the system.	<i>Input</i>
7:	V(*) – <i>double precision</i> array Note: the dimension of the array V must be at least NCODE. <i>On entry:</i> V(i) contains the value of component $V_i(t)$, for $i = 1, 2, \dots, \text{NCODE}$.	<i>Input</i>
8:	VDOT(*) – <i>double precision</i> array Note: the dimension of the array VDOT must be at least NCODE. <i>On entry:</i> VDOT(i) contains the value of component $\dot{V}_i(t)$, for $i = 1, 2, \dots, \text{NCODE}$. Note: $\dot{V}_i(t)$, for $i = 1, 2, \dots, \text{NCODE}$, may only appear linearly in S_j , for $j = 1, 2, \dots, \text{NPDE}$.	<i>Input</i>
9:	P(NPDE,NPDE) – <i>double precision</i> array <i>On exit:</i> P(i, j) must be set to the value of $P_{ij}(x, t, U, V)$, for $i, j = 1, 2, \dots, \text{NPDE}$.	<i>Output</i>
10:	C(NPDE) – <i>double precision</i> array <i>On exit:</i> C(i) must be set to the value of $C_i(x, t, U, V)$, for $i = 1, 2, \dots, \text{NPDE}$.	<i>Output</i>
11:	D(NPDE) – <i>double precision</i> array <i>On exit:</i> D(i) must be set to the value of $D_i(x, t, U, U_x, V)$, for $i = 1, 2, \dots, \text{NPDE}$.	<i>Output</i>
12:	S(NPDE) – <i>double precision</i> array <i>On exit:</i> S(i) must be set to the value of $S_i(x, t, U, V, \dot{V})$, for $i = 1, 2, \dots, \text{NPDE}$.	<i>Output</i>
13:	IRES – INTEGER <i>On entry:</i> set to -1 or 1 . <i>On exit:</i> should usually remain unchanged. However, you may set IRES to force the integration routine to take certain actions as described below: IRES = 2 Indicates to the integrator that control should be passed back immediately to the calling (sub)program with the error indicator set to IFAIL = 6. IRES = 3 Indicates to the integrator that the current time step should be abandoned and a smaller time step used instead. You may wish to set IRES = 3 when a physically	<i>Input/Output</i>

meaningless input or output value has been generated. If you consecutively set IRES = 3, then D03PLF returns to the calling (sub)program with the error indicator set to IFAIL = 4.

PDEDEF must be declared as EXTERNAL in the (sub)program from which D03PLF is called. Parameters denoted as *Input* must **not** be changed by this procedure.

- 5: NUMFLX – SUBROUTINE, supplied by the user. *External Procedure*

NUMFLX must supply the numerical flux for each PDE given the *left* and *right* values of the solution vector U. NUMFLX is called approximately midway between each pair of mesh points in turn by D03PLF.

Its specification is:

SUBROUTINE NUMFLX (NPDE, T, X, NCODE, V, ULEFT, URIGHT, FLUX, IRES)		
INTEGER NPDE, NCODE, IRES		
double precision T, X, V(*), ULEFT(NPDE), URIGHT(NPDE), FLUX(NPDE)		
1:	NPDE – INTEGER	<i>Input</i>
	<i>On entry:</i> the number of PDEs in the system.	
2:	T – double precision	<i>Input</i>
	<i>On entry:</i> the current value of the independent variable <i>t</i> .	
3:	X – double precision	<i>Input</i>
	<i>On entry:</i> the current value of the space variable <i>x</i> .	
4:	NCODE – INTEGER	<i>Input</i>
	<i>On entry:</i> the number of coupled ODEs in the system.	
5:	V(*) – double precision array	<i>Input</i>
	Note: the dimension of the array V must be at least NCODE.	
	<i>On entry:</i> V(<i>i</i>) contains the value of the component $V_i(t)$, for $i = 1, 2, \dots, \text{NCODE}$.	
6:	ULEFT(NPDE) – double precision array	<i>Input</i>
	<i>On entry:</i> ULEFT(<i>i</i>) contains the <i>left</i> value of the component $U_i(x)$, for $i = 1, 2, \dots, \text{NPDE}$.	
7:	URIGHT(NPDE) – double precision array	<i>Input</i>
	<i>On entry:</i> URIGHT(<i>i</i>) contains the <i>right</i> value of the component $U_i(x)$, for $i = 1, 2, \dots, \text{NPDE}$.	
8:	FLUX(NPDE) – double precision array	<i>Output</i>
	<i>On exit:</i> FLUX(<i>i</i>) must be set to the numerical flux \hat{F}_i , for $i = 1, 2, \dots, \text{NPDE}$.	
9:	IRES – INTEGER	<i>Input/Output</i>
	<i>On entry:</i> set to -1 or 1.	
	<i>On exit:</i> should usually remain unchanged. However, you may set IRES to force the integration routine to take certain actions as described below:	

IRES = 2

Indicates to the integrator that control should be passed back immediately to the calling (sub)program with the error indicator set to IFAIL = 6.

IRES = 3

Indicates to the integrator that the current time step should be abandoned and a smaller time step used instead. You may wish to set IRES = 3 when a physically meaningless input or output value has been generated. If you consecutively set IRES = 3, then D03PLF returns to the calling (sub)program with the error indicator set to IFAIL = 4.

NUMFLX must be declared as EXTERNAL in the (sub)program from which D03PLF is called. Parameters denoted as *Input* must **not** be changed by this procedure.

6: BNDARY – SUBROUTINE, supplied by the user. *External Procedure*

BNDARY must evaluate the functions G_i^L and G_i^R which describe the physical and numerical boundary conditions, as given by (8) and (9).

Its specification is:

	SUBROUTINE BNDARY (NPDE, NPTS, T, X, U, NCODE, V, VDOT, IBND, G, 1 IRES)	
	INTEGER NPDE, NPTS, NCODE, IBND, IRES double precision T, X(NPTS), U(NPDE,NPTS), V(*), VDOT(*), G(NPDE)	
1:	NPDE – INTEGER	<i>Input</i>
	<i>On entry:</i> the number of PDEs in the system.	
2:	NPTS – INTEGER	<i>Input</i>
	<i>On entry:</i> the number of mesh points in the interval $[a, b]$.	
3:	T – double precision	<i>Input</i>
	<i>On entry:</i> the current value of the independent variable t .	
4:	X(NPTS) – double precision array	<i>Input</i>
	<i>On entry:</i> the mesh points in the spatial direction. X(1) corresponds to the left-hand boundary, a , and X(NPTS) corresponds to the right-hand boundary, b .	
5:	U(NPDE,NPTS) – double precision array	<i>Input</i>
	<i>On entry:</i> $U(i, j)$ contains the value of the component $U_i(x, t)$ at $x = X(j)$, for $i = 1, 2, \dots, \text{NPDE}$; $j = 1, 2, \dots, \text{NPTS}$.	
	Note: if banded matrix algebra is to be used then the functions G_i^L and G_i^R may depend on the value of $U_i(x, t)$ at the boundary point and the two adjacent points only.	
6:	NCODE – INTEGER	<i>Input</i>
	<i>On entry:</i> the number of coupled ODEs in the system.	
7:	V(*) – double precision array	<i>Input</i>
	Note: the dimension of the array V must be at least NCODE.	
	<i>On entry:</i> V(i) contains the value of component $V_i(t)$, for $i = 1, 2, \dots, \text{NCODE}$.	

8:	<p>VDOT(*) – double precision array</p> <p>Note: the dimension of the array VDOT must be at least NCODE.</p> <p><i>On entry:</i> VDOT(<i>i</i>) contains the value of component $\dot{V}_i(t)$, for $i = 1, 2, \dots, \text{NCODE}$.</p> <p>Note: $\dot{V}_i(t)$, for $i = 1, 2, \dots, \text{NCODE}$, may only appear linearly in G_j^L and G_j^R, for $j = 1, 2, \dots, \text{NPDE}$.</p>	<i>Input</i>
9:	<p>IBND – INTEGER</p> <p><i>On entry:</i> specifies which boundary conditions are to be evaluated.</p> <p>IBND = 0</p> <p style="padding-left: 2em;">BNDARY must evaluate the left-hand boundary condition at $x = a$.</p> <p>IBND \neq 0</p> <p style="padding-left: 2em;">BNDARY must evaluate the right-hand boundary condition at $x = b$.</p>	<i>Input</i>
10:	<p>G(NPDE) – double precision array</p> <p><i>On exit:</i> G(<i>i</i>) must contain the <i>i</i>th component of either G_i^L or G_i^R in (8) and (9), depending on the value of IBND, for $i = 1, 2, \dots, \text{NPDE}$.</p>	<i>Output</i>
11:	<p>IRES – INTEGER</p> <p><i>On entry:</i> set to -1 or 1.</p> <p><i>On exit:</i> should usually remain unchanged. However, you may set IRES to force the integration routine to take certain actions as described below:</p> <p>IRES = 2</p> <p style="padding-left: 2em;">Indicates to the integrator that control should be passed back immediately to the calling (sub)program with the error indicator set to IFAIL = 6.</p> <p>IRES = 3</p> <p style="padding-left: 2em;">Indicates to the integrator that the current time step should be abandoned and a smaller time step used instead. You may wish to set IRES = 3 when a physically meaningless input or output value has been generated. If you consecutively set IRES = 3, then D03PLF returns to the calling (sub)program with the error indicator set to IFAIL = 4.</p>	<i>Input/Output</i>

BNDARY must be declared as EXTERNAL in the (sub)program from which D03PLF is called. Parameters denoted as *Input* must **not** be changed by this procedure.

- 7: U(NEQN) – **double precision** array *Input/Output*
- On entry:* the initial values of the dependent variables defined as follows:
- U(NPDE \times ($j - 1$) + i) contain $U_i(x_j, t_0)$, for $i = 1, 2, \dots, \text{NPDE}$; $j = 1, 2, \dots, \text{NPTS}$ and
U(NPTS \times NPDE + k) contain $V_k(t_0)$, for $k = 1, 2, \dots, \text{NCODE}$.
- On exit:* the computed solution $U_i(x_j, t)$, for $i = 1, 2, \dots, \text{NPDE}$; $j = 1, 2, \dots, \text{NPTS}$, and $V_k(t)$, for $k = 1, 2, \dots, \text{NCODE}$, all evaluated at $t = \text{TS}$.
- 8: NPTS – INTEGER *Input*
- On entry:* the number of mesh points in the interval $[a, b]$.
- Constraint:* NPTS \geq 3.

- 9: X(NPTS) – **double precision** array *Input*
On entry: the mesh points in the space direction. X(1) must specify the left-hand boundary, a , and X(NPTS) must specify the right-hand boundary, b .
Constraint: $X(1) < X(2) < \dots < X(NPTS)$.
- 10: NCODE – INTEGER *Input*
On entry: the number of coupled ODE components.
Constraint: $NCODE \geq 0$.
- 11: ODEDEF – SUBROUTINE, supplied by the user. *External Procedure*
 ODEDEF must evaluate the functions R , which define the system of ODEs, as given in (4). If you wish to compute the solution of a system of PDEs only (i.e., $NCODE = 0$), ODEDEF must be the dummy routine D03PEK. (D03PEK is included in the NAG Fortran Library; however, its name may be implementation-dependent: see the Users' Note for your implementation for details.)
 Its specification is:

	<pre> SUBROUTINE ODEDEF (NPDE, T, NCODE, V, VDOT, NXI, XI, UCP, UCPX, 1 UCPT, R, IRES) INTEGER NPDE, NCODE, NXI, IRES double precision T, V(*), VDOT(*), XI(*), UCP(NPDE,*), 1 UCPX(NPDE,*), UCPT(NPDE,*), R(*) </pre>	
1:	NPDE – INTEGER <i>On entry:</i> the number of PDEs in the system.	<i>Input</i>
2:	T – double precision <i>On entry:</i> the current value of the independent variable t .	<i>Input</i>
3:	NCODE – INTEGER <i>On entry:</i> the number of coupled ODEs in the system.	<i>Input</i>
4:	V(*) – double precision array Note: the dimension of the array V must be at least NCODE. <i>On entry:</i> V(i) contains the value of component $V_i(t)$, for $i = 1, 2, \dots, NCODE$.	<i>Input</i>
5:	VDOT(*) – double precision array Note: the dimension of the array VDOT must be at least NCODE. <i>On entry:</i> VDOT(i) contains the value of component $\dot{V}_i(t)$, for $i = 1, 2, \dots, NCODE$.	<i>Input</i>
6:	NXI – INTEGER <i>On entry:</i> the number of ODE/PDE coupling points.	<i>Input</i>
7:	XI(*) – double precision array Note: the dimension of the array XI must be at least NXI. <i>On entry:</i> XI(i) contains the ODE/PDE coupling point, ξ_i , for $i = 1, 2, \dots, NXI$.	<i>Input</i>

8:	UCP(NPDE,*) – double precision array	<i>Input</i>
	Note: the second dimension of the array UCP must be at least max(1, NXI).	
	<i>On entry:</i> UCP(<i>i</i> , <i>j</i>) contains the value of $U_i(x, t)$ at the coupling point $x = \xi_j$, for $i = 1, 2, \dots, \text{NPDE}$; $j = 1, 2, \dots, \text{NXI}$.	
9:	UCPX(NPDE,*) – double precision array	<i>Input</i>
	Note: the second dimension of the array UCPX must be at least max(1, NXI).	
	<i>On entry:</i> UCPX(<i>i</i> , <i>j</i>) contains the value of $\frac{\partial U_i(x, t)}{\partial x}$ at the coupling point $x = \xi_j$, for $i = 1, 2, \dots, \text{NPDE}$; $j = 1, 2, \dots, \text{NXI}$.	
10:	UCPT(NPDE,*) – double precision array	<i>Input</i>
	Note: the second dimension of the array UCPT must be at least max(1, NXI).	
	<i>On entry:</i> UCPT(<i>i</i> , <i>j</i>) contains the value of $\frac{\partial U_i}{\partial t}$ at the coupling point $x = \xi_j$, for $i = 1, 2, \dots, \text{NPDE}$; $j = 1, 2, \dots, \text{NXI}$.	
11:	R(*) – double precision array	<i>Output</i>
	Note: the dimension of the array R must be at least NCODE.	
	<i>On exit:</i> R(<i>i</i>) must contain the <i>i</i> th component of R, for $i = 1, 2, \dots, \text{NCODE}$, where R is defined as	
	$R = L - M\dot{V} - NU_t^*, \quad (10)$	
	or	
	$R = -M\dot{V} - NU_t^*. \quad (11)$	
	The definition of R is determined by the input value of IRES.	
12:	IRES – INTEGER	<i>Input/Output</i>
	<i>On entry:</i> the form of R that must be returned in the array R. If IRES = 1, then equation (10) must be used. If IRES = -1, then equation (11) must be used.	
	<i>On exit:</i> should usually remain unchanged. However, you may reset IRES to force the integration routine to take certain actions as described below:	
	IRES = 2	
	Indicates to the integrator that control should be passed back immediately to the calling (sub)program with the error indicator set to IFAIL = 6.	
	IRES = 3	
	Indicates to the integrator that the current time step should be abandoned and a smaller time step used instead. You may wish to set IRES = 3 when a physically meaningless input or output value has been generated. If you consecutively set IRES = 3, then D03PLF returns to the calling (sub)program with the error indicator set to IFAIL = 4.	

ODEDEF must be declared as EXTERNAL in the (sub)program from which D03PLF is called. Parameters denoted as *Input* must **not** be changed by this procedure.

12:	NXI – INTEGER	<i>Input</i>
	<i>On entry:</i> the number of ODE/PDE coupling points.	

Constraints:

if NCODE = 0, NXI = 0;
 if NCODE > 0, NXI ≥ 0.

- 13: XI(*) – **double precision** array *Input*
Note: the dimension of the array XI must be at least max(1, NXI).
On entry: XI(*i*), for $i = 1, 2, \dots, \text{NXI}$, must be set to the ODE/PDE coupling points.
Constraint: $X(1) \leq \text{XI}(1) < \text{XI}(2) < \dots < \text{XI}(\text{NXI}) \leq X(\text{NPTS})$.
- 14: NEQN – INTEGER *Input*
On entry: the number of ODEs in the time direction.
Constraint: $\text{NEQN} = \text{NPDE} \times \text{NPTS} + \text{NCODE}$.
- 15: RTOL(*) – **double precision** array *Input*
Note: the dimension of the array RTOL must be at least 1 if ITOL = 1 or 2 and at least NEQN if ITOL = 3 or 4.
On entry: the relative local error tolerance.
Constraint: $\text{RTOL}(i) \geq 0$ for all relevant *i*.
- 16: ATOL(*) – **double precision** array *Input*
Note: the dimension of the array ATOL must be at least 1 if ITOL = 1 or 3 and at least NEQN if ITOL = 2 or 4.
On entry: the absolute local error tolerance.
Constraint: $\text{ATOL}(i) \geq 0$ for all relevant *i*.
Note: corresponding elements of RTOL and ATOL cannot both be 0.0.
- 17: ITOL – INTEGER *Input*
On entry: a value to indicate the form of the local error test. If e_i is the estimated local error for $U(i)$, for $i = 1, 2, \dots, \text{NEQN}$, and $\| \cdot \|$ denotes the norm, then the error test to be satisfied is $\|e_i\| < 1.0$. ITOL indicates to D03PLF whether to interpret either or both of RTOL and ATOL as a vector or scalar in the formation of the weights w_i used in the calculation of the norm (see the description of NORM):
- | ITOL | RTOL | ATOL | w_i |
|------|--------|--------|---|
| 1 | scalar | scalar | $\text{RTOL}(1) \times U(i) + \text{ATOL}(1)$ |
| 2 | scalar | vector | $\text{RTOL}(1) \times U(i) + \text{ATOL}(i)$ |
| 3 | vector | scalar | $\text{RTOL}(i) \times U(i) + \text{ATOL}(1)$ |
| 4 | vector | vector | $\text{RTOL}(i) \times U(i) + \text{ATOL}(i)$ |
- Constraint:* $1 \leq \text{ITOL} \leq 4$.
- 18: NORM – CHARACTER*1 *Input*
On entry: the type of norm to be used.
 NORM = '1'
 Averaged L_1 norm.
 NORM = '2'
 Averaged L_2 norm.

If U_{norm} denotes the norm of the vector U of length NEQN , then for the averaged L_1 norm

$$U_{\text{norm}} = \frac{1}{\text{NEQN}} \sum_{i=1}^{\text{NEQN}} U(i)/w_i,$$

and for the averaged L_2 norm

$$U_{\text{norm}} = \sqrt{\frac{1}{\text{NEQN}} \sum_{i=1}^{\text{NEQN}} (U(i)/w_i)^2}.$$

See the description of ITOL for the formulation of the weight vector w .

Constraint: NORM = '1' or '2'.

19: LAOPT – CHARACTER*1 *Input*

On entry: the type of matrix algebra required.

LAOPT = 'F'

Full matrix methods to be used.

LAOPT = 'B'

Banded matrix methods to be used.

LAOPT = 'S'

Sparse matrix methods to be used.

Constraint: LAOPT = 'F', 'B' or 'S'.

Note: you are recommended to use the banded option when no coupled ODEs are present (NCODE = 0). Also, the banded option should not be used if the boundary conditions involve solution components at points other than the boundary and the immediately adjacent two points.

20: ALGOPT(30) – *double precision* array *Input*

On entry: may be set to control various options available in the integrator. If you wish to employ all the default options, then ALGOPT(1) should be set to 0.0. Default values will also be used for any other elements of ALGOPT set to zero. The permissible values, default values, and meanings are as follows:

ALGOPT(1)

Selects the ODE integration method to be used. If ALGOPT(1) = 1.0, a BDF method is used and if ALGOPT(1) = 2.0, a Theta method is used. The default is ALGOPT(1) = 1.0.

If ALGOPT(1) = 2.0, then ALGOPT(i), for $i = 2, 3, 4$ are not used.

ALGOPT(2)

Specifies the maximum order of the BDF integration formula to be used. ALGOPT(2) may be 1.0, 2.0, 3.0, 4.0 or 5.0. The default value is ALGOPT(2) = 5.0.

ALGOPT(3)

Specifies what method is to be used to solve the system of nonlinear equations arising on each step of the BDF method. If ALGOPT(3) = 1.0 a modified Newton iteration is used and if ALGOPT(3) = 2.0 a functional iteration method is used. If functional iteration is selected and the integrator encounters difficulty, then there is an automatic switch to the modified Newton iteration. The default value is ALGOPT(3) = 1.0.

ALGOPT(4)

Specifies whether or not the Petzold error test is to be employed. The Petzold error test results in extra overhead but is more suitable when algebraic equations are present, such as $P_{ij} = 0.0$, for $j = 1, 2, \dots, \text{NPDE}$ for some i or when there is no $\dot{V}_i(t)$ dependence in the

coupled ODE system. If $\text{ALGOPT}(4) = 1.0$, then the Petzold test is used. If $\text{ALGOPT}(4) = 2.0$, then the Petzold test is not used. The default value is $\text{ALGOPT}(4) = 1.0$.

If $\text{ALGOPT}(1) = 1.0$, then $\text{ALGOPT}(i)$, for $i = 5, 6, 7$ are not used.

$\text{ALGOPT}(5)$

Specifies the value of Theta to be used in the Theta integration method. $0.51 \leq \text{ALGOPT}(5) \leq 0.99$. The default value is $\text{ALGOPT}(5) = 0.55$.

$\text{ALGOPT}(6)$

Specifies what method is to be used to solve the system of nonlinear equations arising on each step of the Theta method. If $\text{ALGOPT}(6) = 1.0$, a modified Newton iteration is used and if $\text{ALGOPT}(6) = 2.0$, a functional iteration method is used. The default value is $\text{ALGOPT}(6) = 1.0$.

$\text{ALGOPT}(7)$

Specifies whether or not the integrator is allowed to switch automatically between modified Newton and functional iteration methods in order to be more efficient. If $\text{ALGOPT}(7) = 1.0$, then switching is allowed and if $\text{ALGOPT}(7) = 2.0$, then switching is not allowed. The default value is $\text{ALGOPT}(7) = 1.0$.

$\text{ALGOPT}(11)$

Specifies a point in the time direction, t_{crit} , beyond which integration must not be attempted. The use of t_{crit} is described under the parameter ITASK. If $\text{ALGOPT}(1) \neq 0.0$, a value of 0.0 for $\text{ALGOPT}(11)$, say, should be specified even if ITASK subsequently specifies that t_{crit} will not be used.

$\text{ALGOPT}(12)$

Specifies the minimum absolute step size to be allowed in the time integration. If this option is not required, $\text{ALGOPT}(12)$ should be set to 0.0.

$\text{ALGOPT}(13)$

Specifies the maximum absolute step size to be allowed in the time integration. If this option is not required, $\text{ALGOPT}(13)$ should be set to 0.0.

$\text{ALGOPT}(14)$

Specifies the initial step size to be attempted by the integrator. If $\text{ALGOPT}(14) = 0.0$, then the initial step size is calculated internally.

$\text{ALGOPT}(15)$

Specifies the maximum number of steps to be attempted by the integrator in any one call. If $\text{ALGOPT}(15) = 0.0$, then no limit is imposed.

$\text{ALGOPT}(23)$

Specifies what method is to be used to solve the nonlinear equations at the initial point to initialize the values of U , U_t , V and \dot{V} . If $\text{ALGOPT}(23) = 1.0$, a modified Newton iteration is used and if $\text{ALGOPT}(23) = 2.0$, functional iteration is used. The default value is $\text{ALGOPT}(23) = 1.0$.

$\text{ALGOPT}(29)$ and $\text{ALGOPT}(30)$ are used only for the sparse matrix algebra option, i.e., $\text{LAOPT} = 'S'$.

$\text{ALGOPT}(29)$

Governs the choice of pivots during the decomposition of the first Jacobian matrix. It should lie in the range $0.0 < \text{ALGOPT}(29) < 1.0$, with smaller values biasing the algorithm towards maintaining sparsity at the expense of numerical stability. If $\text{ALGOPT}(29)$ lies outside the range then the default value is used. If the routines regard the Jacobian matrix as numerically singular, then increasing $\text{ALGOPT}(29)$ towards 1.0 may help, but at the cost of increased fill-in. The default value is $\text{ALGOPT}(29) = 0.1$.

ALGOPT(30)

Used as the relative pivot threshold during subsequent Jacobian decompositions (see ALGOPT(29)) below which an internal error is invoked. ALGOPT(30) must be greater than zero, otherwise the default value is used. If ALGOPT(30) is greater than 1.0 no check is made on the pivot size, and this may be a necessary option if the Jacobian matrix is found to be numerically singular (see ALGOPT(29)). The default value is $\text{ALGOPT}(30) = 0.0001$.

- 21: RSAVE(LRSAVE) – *double precision* array *Communication Array*

If $\text{IND} = 0$, RSAVE need not be set on entry.

If $\text{IND} = 1$, RSAVE must be unchanged from the previous call to the routine because it contains required information about the iteration.

- 22: LRSAVE – INTEGER *Input*

On entry: the dimension of the array RSAVE as declared in the (sub)program from which D03PLF is called. Its size depends on the type of matrix algebra selected.

If $\text{LAOPT} = 'F'$, $\text{LRSAVE} \geq \text{NEQN} \times \text{NEQN} + \text{NEQN} + \text{NWKRES} + \text{LENODE}$.

If $\text{LAOPT} = 'B'$, $\text{LRSAVE} \geq (3 \times \text{MLU} + 1) \times \text{NEQN} + \text{NWKRES} + \text{LENODE}$.

If $\text{LAOPT} = 'S'$, $\text{LRSAVE} \geq 4 \times \text{NEQN} + 11 \times \text{NEQN}/2 + 1 + \text{NWKRES} + \text{LENODE}$.

Where

$\text{MLU} =$ the lower or upper half bandwidths, and
 $\text{MLU} = 3 \times \text{NPDE} - 1$, for PDE problems only, and
 $\text{MLU} = \text{NEQN} - 1$, for coupled PDE/ODE problems.

$\text{NWKRES} = \text{NPDE} \times (2 \times \text{NPTS} + 6 \times \text{NXI} + 3 \times \text{NPDE} + 26) + \text{NXI} + \text{NCODE} + 7 \times \text{NPTS} + 2$, when $\text{NCODE} > 0$ and $\text{NXI} > 0$, and
 $\text{NWKRES} = \text{NPDE} \times (2 \times \text{NPTS} + 3 \times \text{NPDE} + 32) + \text{NCODE} + 7 \times \text{NPTS} + 3$, when $\text{NCODE} > 0$ and $\text{NXI} = 0$, and
 $\text{NWKRES} = \text{NPDE} \times (2 \times \text{NPTS} + 3 \times \text{NPDE} + 32) + 7 \times \text{NPTS} + 4$, when $\text{NCODE} = 0$.

$\text{LENODE} = (6 + \text{int}(\text{ALGOPT}(2))) \times \text{NEQN} + 50$, when the BDF method is used, and
 $\text{LENODE} = 9 \times \text{NEQN} + 50$, when the Theta method is used.

Note: when $\text{LAOPT} = 'S'$, the value of LRSAVE may be too small when supplied to the integrator. An estimate of the minimum size of LRSAVE is printed on the current error message unit if $\text{ITRACE} > 0$ and the routine returns with $\text{IFAIL} = 15$.

- 23: ISAVE(LISAVE) – INTEGER array *Communication Array*

If $\text{IND} = 0$, ISAVE need not be set.

If $\text{IND} = 1$, ISAVE must be unchanged from the previous call to the routine because it contains required information about the iteration. In particular the following components of the array ISAVE concern the efficiency of the integration:

ISAVE(1)

Contains the number of steps taken in time.

ISAVE(2)

Contains the number of residual evaluations of the resulting ODE system used. One such evaluation involves evaluating the PDE functions at all the mesh points, as well as one evaluation of the functions in the boundary conditions.

ISAVE(3)

Contains the number of Jacobian evaluations performed by the time integrator.

ISAVE(4)

Contains the order of the BDF method last used in the time integration, if applicable. When the Theta method is used ISAVE(4) contains no useful information.

ISAVE(5)

Contains the number of Newton iterations performed by the time integrator. Each iteration involves residual evaluation of the resulting ODE system followed by a back-substitution using the *LU* decomposition of the Jacobian matrix.

24: LISAVE – INTEGER

Input

On entry: the dimension of the array ISAVE as declared in the (sub)program from which D03PLF is called. Its size depends on the type of matrix algebra selected:

if LAOPT = 'F', LISAVE \geq 24;
 if LAOPT = 'B', LISAVE \geq NEQN + 24;
 if LAOPT = 'S', LISAVE \geq 25 \times NEQN + 24.

Note: when using the sparse option, the value of LISAVE may be too small when supplied to the integrator. An estimate of the minimum size of LISAVE is printed on the current error message unit if ITRACE > 0 and the routine returns with IFAIL = 15.

25: ITASK – INTEGER

Input

On entry: the task to be performed by the ODE integrator.

ITASK = 1

Normal computation of output values U at $t = \text{TOUT}$ (by overshooting and interpolating).

ITASK = 2

Take one step in the time direction and return.

ITASK = 3

Stop at first internal integration point at or beyond $t = \text{TOUT}$.

ITASK = 4

Normal computation of output values U at $t = \text{TOUT}$ but without overshooting $t = t_{\text{crit}}$ where t_{crit} is described under the parameter ALGOPT.

ITASK = 5

Take one step in the time direction and return, without passing t_{crit} , where t_{crit} is described under the parameter ALGOPT.

Constraint: $1 \leq \text{ITASK} \leq 5$.

26: ITRACE – INTEGER

Input

On entry: the level of trace information required from D03PLF and the underlying ODE solver. ITRACE may take the value -1, 0, 1, 2, or 3.

ITRACE = -1

No output is generated.

ITRACE = 0

Only warning messages from the PDE solver are printed on the current error message unit (see X04AAF).

ITRACE > 0

Output from the underlying ODE solver is printed on the current advisory message unit (see X04ABF). This output contains details of Jacobian entries, the nonlinear iteration and the time integration during the computation of the ODE system.

If ITRACE < -1 , then -1 is assumed and similarly if ITRACE > 3 , then 3 is assumed.

The advisory messages are given in greater detail as ITRACE increases. You are advised to set ITRACE = 0, unless you are experienced with sub-chapter D02M/N.

27: IND – INTEGER *Input/Output*

On entry: must be set to 0 or 1.

IND = 0

Starts or restarts the integration in time.

IND = 1

Continues the integration after an earlier exit from the routine. In this case, only the parameters TOUT and IFAIL should be reset between calls to D03PLF.

Constraint: $0 \leq \text{IND} \leq 1$.

On exit: IND = 1.

28: IFAIL – INTEGER *Input/Output*

On entry: IFAIL must be set to 0, -1 or 1. If you are unfamiliar with this parameter you should refer to Chapter P01 for details.

On exit: IFAIL = 0 unless the routine detects an error (see Section 6).

For environments where it might be inappropriate to halt program execution when an error is detected, the value -1 or 1 is recommended. If the output of error messages is undesirable, then the value 1 is recommended. Otherwise, if you are not familiar with this parameter the recommended value is 0. **When the value -1 or 1 is used it is essential to test the value of IFAIL on exit.**

6 Error Indicators and Warnings

If on entry IFAIL = 0 or -1 , explanatory error messages are output on the current error message unit (as defined by X04AAF).

Errors or warnings detected by the routine:

IFAIL = 1

On entry, TS \geq TOUT,
 or TOUT – TS is too small,
 or ITASK \neq 1, 2, 3, 4 or 5,
 or at least one of the coupling points defined in array XI is outside the interval $[X(1), X(NPTS)]$,
 or the coupling points are not in strictly increasing order,
 or NPTS < 3 ,
 or NPDE < 1 ,
 or LAOPT \neq 'F', 'B' or 'S',
 or ITOL \neq 1, 2, 3 or 4,
 or IND \neq 0 or 1,
 or mesh points $X(i)$ badly ordered,
 or LRSAVE or LISAVE are too small,
 or NCODE and NXI are incorrectly defined,
 or IND = 1 on initial entry to D03PLF,
 or NEQN \neq NPDE \times NPTS + NCODE,
 or an element of RTOL or ATOL < 0.0 ,
 or corresponding elements of RTOL and ATOL are both 0.0,
 or NORM \neq 1 or 2.

IFAIL = 2

The underlying ODE solver cannot make any further progress, with the values of ATOL and RTOL, across the integration range from the current point $t = TS$. The components of U contain the computed values at the current point $t = TS$.

IFAIL = 3

In the underlying ODE solver, there were repeated error test failures on an attempted step, before completing the requested task, but the integration was successful as far as $t = TS$. The problem may have a singularity, or the error requirement may be inappropriate. Incorrect specification of boundary conditions may also result in this error.

IFAIL = 4

In setting up the ODE system, the internal initialization routine was unable to initialize the derivative of the ODE system. This could be due to the fact that IRES was repeatedly set to 3 in one of the user-supplied (sub)programs PDEDEF, NUMFLX, BNDARY or ODEDEF, when the residual in the underlying ODE solver was being evaluated. Incorrect specification of boundary conditions may also result in this error.

IFAIL = 5

In solving the ODE system, a singular Jacobian has been encountered. Check the problem formulation.

IFAIL = 6

When evaluating the residual in solving the ODE system, IRES was set to 2 in at least one of the user-supplied (sub)programs PDEDEF, NUMFLX, BNDARY or ODEDEF. Integration was successful as far as $t = TS$.

IFAIL = 7

The values of ATOL and RTOL are so small that the routine is unable to start the integration in time.

IFAIL = 8

In one of the user-supplied (sub)programs, PDEDEF, NUMFLX, BNDARY or ODEDEF, IRES was set to an invalid value.

IFAIL = 9 (D02NNF)

A serious error has occurred in an internal call to the specified routine. Check problem specification and all parameters and array dimensions. Setting ITRACE = 1 may provide more information. If the problem persists, contact NAG.

IFAIL = 10

The required task has been completed, but it is estimated that a small change in ATOL and RTOL is unlikely to produce any change in the computed solution. (Only applies when you are not operating in one step mode, that is when ITASK \neq 2 or 5.)

IFAIL = 11

An error occurred during Jacobian formulation of the ODE system (a more detailed error description may be directed to the current advisory message unit when ITRACE \geq 1). If using the sparse matrix algebra option, the values of ALGOPT(29) and ALGOPT(30) may be inappropriate.

IFAIL = 12

In solving the ODE system, the maximum number of steps specified in ALGOPT(15) has been taken.

IFAIL = 13

Some error weights w_i became zero during the time integration (see the description of ITOL). Pure relative error control ($ATOL(i) = 0.0$) was requested on a variable (the i th) which has become zero. The integration was successful as far as $t = TS$.

IFAIL = 14

One or more of the functions P_{ij} , D_i or C_i was detected as depending on time derivatives, which is not permissible.

IFAIL = 15

When using the sparse option, the value of LISAVE or LRSAVE was not sufficient (more detailed information may be directed to the current error message unit).

7 Accuracy

D03PLF controls the accuracy of the integration in the time direction but not the accuracy of the approximation in space. The spatial accuracy depends on both the number of mesh points and on their distribution in space. In the time integration only the local error over a single step is controlled and so the accuracy over a number of steps cannot be guaranteed. You should therefore test the effect of varying the accuracy parameters, ATOL and RTOL.

8 Further Comments

D03PLF is designed to solve systems of PDEs in conservative form, with optional source terms which are independent of space derivatives, and optional second-order diffusion terms. The use of the routine to solve systems which are not naturally in this form is discouraged, and you are advised to use one of the central-difference schemes for such problems.

You should be aware of the stability limitations for hyperbolic PDEs. For most problems with small error tolerances the ODE integrator does not attempt unstable time steps, but in some cases a maximum time step should be imposed using ALGOPT(13). It is worth experimenting with this parameter, particularly if the integration appears to progress unrealistically fast (with large time steps). Setting the maximum time step to the minimum mesh size is a safe measure, although in some cases this may be too restrictive.

Problems with source terms should be treated with caution, as it is known that for large source terms stable and reasonable looking solutions can be obtained which are in fact incorrect, exhibiting non-physical speeds of propagation of discontinuities (typically one spatial mesh point per time step). It is essential to employ a very fine mesh for problems with source terms and discontinuities, and to check for non-physical propagation speeds by comparing results for different mesh sizes. Further details and an example can be found in Pennington and Berzins (1994).

The time taken depends on the complexity of the system and on the accuracy requested. For a given system and a fixed accuracy it is approximately proportional to NEQN.

9 Example

For this routine two examples are presented, with a main program and two example problems given in the (sub)programs EX1 and EX2.

Example 1 (EX1)

This example is a simple first-order system with coupled ODEs arising from the use of the characteristic equations for the numerical boundary conditions.

The PDEs are

$$\begin{aligned}\frac{\partial U_1}{\partial t} + \frac{\partial U_1}{\partial x} + 2\frac{\partial U_2}{\partial x} &= 0, \\ \frac{\partial U_2}{\partial t} + 2\frac{\partial U_1}{\partial x} + \frac{\partial U_2}{\partial x} &= 0,\end{aligned}$$

for $x \in [0, 1]$ and $t \geq 0$.

The PDEs have an exact solution given by

$$U_1(x, t) = f(x - 3t) + g(x + t), U_2(x, t) = f(x - 3t) - g(x + t),$$

where $f(z) = \exp(\pi z) \sin(2\pi z)$, $g(z) = \exp(-2\pi z) \cos(2\pi z)$.

The initial conditions are given by the exact solution.

The characteristic variables are $W_1 = U_1 - U_2$ and $W_2 = U_1 + U_2$, corresponding to the characteristics given by $dx/dt = -1$ and $dx/dt = 3$ respectively. Hence we require a physical boundary condition for W_2 at the left-hand boundary and for W_1 at the right-hand boundary (corresponding to the incoming characteristics), and a numerical boundary condition for W_1 at the left-hand boundary and for W_2 at the right-hand boundary (outgoing characteristics).

The physical boundary conditions are obtained from the exact solution, and the numerical boundary conditions are supplied in the form of the characteristic equations for the outgoing characteristics, that is

$$\frac{\partial W_1}{\partial t} - \frac{\partial W_1}{\partial x} = 0$$

at the left-hand boundary, and

$$\frac{\partial W_2}{\partial t} + 3\frac{\partial W_2}{\partial x} = 0$$

at the right-hand boundary.

In order to specify these boundary conditions, two ODE variables V_1 and V_2 are introduced, defined by

$$\begin{aligned}V_1(t) = W_1(0, t) &= U_1(0, t) - U_2(0, t), \\ V_2(t) = W_2(1, t) &= U_1(1, t) + U_2(1, t).\end{aligned}$$

The coupling points are therefore at $x = 0$ and $x = 1$.

The numerical boundary conditions are now

$$\dot{V}_1 - \frac{\partial W_1}{\partial x} = 0$$

at the left-hand boundary, and

$$\dot{V}_2 + 3\frac{\partial W_2}{\partial x} = 0$$

at the right-hand boundary.

The spatial derivatives are evaluated at the appropriate boundary points in the user-supplied (sub)program BNDARY using one-sided differences (into the domain and therefore consistent with the characteristic directions).

The numerical flux is calculated using Roe's approximate Riemann solver (see Section 3 for details), giving

$$\hat{F} = \frac{1}{2} \begin{bmatrix} 3U_{1L} - U_{1R} + 3U_{2L} + U_{2R} \\ 3U_{1L} + U_{1R} + 3U_{2L} - U_{2R} \end{bmatrix}.$$

Example 2 (EX2)

This example is the standard shock-tube test problem proposed by Sod (1978) for the Euler equations of gas dynamics. The problem models the flow of a gas in a long tube following the sudden breakdown of a

diaphragm separating two initial gas states at different pressures and densities. There is an exact solution to this problem which is not included explicitly as the calculation is quite lengthy. The PDEs are

$$\begin{aligned}\frac{\partial \rho}{\partial t} + \frac{\partial m}{\partial x} &= 0, \\ \frac{\partial m}{\partial t} + \frac{\partial}{\partial x} \left(\frac{m^2}{\rho} + (\gamma - 1) \left(e - \frac{m^2}{2\rho} \right) \right) &= 0, \\ \frac{\partial e}{\partial t} + \frac{\partial}{\partial x} \left(\frac{me}{\rho} + \frac{m}{\rho} (\gamma - 1) \left(e - \frac{m^2}{2\rho} \right) \right) &= 0,\end{aligned}$$

where ρ is the density; m is the momentum, such that $m = \rho u$, where u is the velocity; e is the specific energy; and γ is the (constant) ratio of specific heats. The pressure p is given by

$$p = (\gamma - 1) \left(e - \frac{\rho u^2}{2} \right).$$

The solution domain is $0 \leq x \leq 1$ for $0 < t \leq 0.2$, with the initial discontinuity at $x = 0.5$, and initial conditions

$$\begin{aligned}\rho(x, 0) &= 1, & m(x, 0) &= 0, & e(x, 0) &= 2.5, & \text{for } x < 0.5, \\ \rho(x, 0) &= 0.125, & m(x, 0) &= 0, & e(x, 0) &= 0.25, & \text{for } x > 0.5.\end{aligned}$$

The solution is uniform and constant at both boundaries for the spatial domain and time of integration stated, and hence the physical and numerical boundary conditions are indistinguishable and are both given by the initial conditions above. The evaluation of the numerical flux for the Euler equations is not trivial; the Roe algorithm given in Section 3 cannot be used directly as the Jacobian is nonlinear. However, an algorithm is available using the parameter-vector method (see Roe (1981)), and this is provided in the utility routine D03PUF. An alternative Approximate Riemann Solver using Osher's scheme is provided in D03PVF. Either D03PUF or D03PVF can be called from the user-supplied (sub)program NUMFLX.

9.1 Program Text

```
*      D03PLF Example Program Text
*      Mark 18 Revised. NAG Copyright 1997.
*      .. Parameters ..
      INTEGER          NOUT
      PARAMETER       (NOUT=6)
*      .. External Subroutines ..
      EXTERNAL        EX1, EX2
*      .. Executable Statements ..
      WRITE (NOUT,*) 'D03PLF Example Program Results'
      CALL EX1
      CALL EX2
      STOP
      END

*
      SUBROUTINE EX1
*      .. Parameters ..
      INTEGER          NOUT
      PARAMETER       (NOUT=6)
      INTEGER          NPDE, NPTS, NCODE, NXI, NEQN, NIW, NW, OUTPTS
      PARAMETER       (NPDE=2, NPTS=141, NCODE=2, NXI=2,
+                    NEQN=NPDE*NPTS+NCODE, NIW=15700, NW=11000, OUTPTS=8)
*      .. Local Scalars ..
      DOUBLE PRECISION TOUT, TS
      INTEGER          I, IFAIL, II, IND, ITASK, ITOL, ITRACE, J, NOP
      CHARACTER       LAOPT, NORM
*      .. Local Arrays ..
      DOUBLE PRECISION ALGOPT(30), ATOL(1), RTOL(1), U(NEQN),
+                    UE(NPDE,OUTPTS), UOUT(NPDE,OUTPTS), W(NW),
+                    X(NPTS), XI(NXI), XOUT(OUTPTS)
      INTEGER          IW(NIW)
*      .. External Subroutines ..
      EXTERNAL        BNDRY1, D03PLF, EXACT, NMFLX1, ODEDEF, PDEDEF
*      .. Executable Statements ..
      WRITE (NOUT,*)
```

```

WRITE (NOUT,*)
WRITE (NOUT,*) 'Example 1'
WRITE (NOUT,*)
*
ITRACE = 0
ITOL = 1
NORM = '1'
ATOL(1) = 0.1D-4
RTOL(1) = 0.25D-3
WRITE (NOUT,99995) NPTS, ATOL, RTOL
*
Initialise mesh ..
*
DO 20 I = 1, NPTS
  X(I) = (I-1.0D0)/(NPTS-1.0D0)
20 CONTINUE
XI(1) = 0.0D0
XI(2) = 1.0D0
*
Set initial values ..
TS = 0.0D0
CALL EXACT(TS,U,NPDE,X,NPTS)
U(NEQN-1) = U(1) - U(2)
U(NEQN) = U(NEQN-2) + U(NEQN-3)
*
LAOPT = 'S'
IND = 0
ITASK = 1
*
DO 40 I = 1, 30
  ALGOPT(I) = 0.0D0
40 CONTINUE
*
Theta integration
ALGOPT(1) = 1.0D0
*
Sparse matrix algebra parameters
ALGOPT(29) = 0.1D0
ALGOPT(30) = 1.1D0
*
TOUT = 0.5D0
IFAIL = 0
*
CALL D03PLF(NPDE,TS,TOUT,PDEDEF,NMFLX1,BNDRY1,U,NPTS,X,NCODE,
+          ODEDEF,NXI,XI,NEQN,RTOL,ATOL,ITOL,NORM,LAOPT,ALGOPT,W,
+          NW,IW,NIW,ITASK,ITRACE,IND,IFAIL)
*
Set output points ..
NOP = 0
DO 60 I = 1, NPTS, 20
  NOP = NOP + 1
  XOUT(NOP) = X(I)
60 CONTINUE
*
WRITE (NOUT,99996) TS
WRITE (NOUT,99999)
*
DO 80 I = 1, NOP
  II = 1 + 20*(I-1)
  J = NPDE*(II-1)
  UOUT(1,I) = U(J+1)
  UOUT(2,I) = U(J+2)
80 CONTINUE
*
Check against exact solution ..
CALL EXACT(TOUT,UE,NPDE,XOUT,NOP)
DO 100 I = 1, NOP
  WRITE (NOUT,99998) XOUT(I), UOUT(1,I), UE(1,I), UOUT(2,I),
+  UE(2,I)
100 CONTINUE
WRITE (NOUT,99997)
*
WRITE (NOUT,99994) IW(1), IW(2), IW(3), IW(5)

```

```

      RETURN
*
99999 FORMAT (8X,'X',8X,'Approx U1',3X,'Exact U1',4X,'Approx U2',3X,
+           'Exact U2',/)
99998 FORMAT (5(3X,F9.4))
99997 FORMAT (1X,E10.4,4(2X,E12.4))
99996 FORMAT (' T = ',F6.3)
99995 FORMAT (/ ' NPTS = ',I4,' ATOL = ',E10.3,' RTOL = ',E10.3,/)
99994 FORMAT (' Number of integration steps in time = ',I6,/' Number ',
+           'of function evaluations = ',I6,/' Number of Jacobian ',
+           'evaluations = ',I6,/' Number of iterations = ',I6)
      END
*
      SUBROUTINE PDEDEF(NPDE,T,X,U,UX,NCODE,V,VDOT,P,C,D,S,IRES)
*
      .. Scalar Arguments ..
      DOUBLE PRECISION T, X
      INTEGER          IRES, NCODE, NPDE
*
      .. Array Arguments ..
      DOUBLE PRECISION C(NPDE), D(NPDE), P(NPDE,NPDE), S(NPDE),
+           U(NPDE), UX(NPDE), V(*), VDOT(*)
*
      .. Local Scalars ..
      INTEGER          I, J
*
      .. Executable Statements ..
      DO 40 I = 1, NPDE
          C(I) = 1.0D0
          D(I) = 0.0D0
          S(I) = 0.0D0
          DO 20 J = 1, NPDE
              IF (I.EQ.J) THEN
                  P(I,J) = 1.0D0
              ELSE
                  P(I,J) = 0.0D0
              END IF
          20 CONTINUE
      40 CONTINUE
      RETURN
      END
*
      SUBROUTINE BNDRY1(NPDE,NPTS,T,X,U,NCODE,V,VDOT,IBND,G,IRES)
*
      .. Scalar Arguments ..
      DOUBLE PRECISION T
      INTEGER          IBND, IRES, NCODE, NPDE, NPTS
*
      .. Array Arguments ..
      DOUBLE PRECISION G(NPDE), U(NPDE,NPTS), V(*), VDOT(*), X(NPTS)
*
      .. Local Scalars ..
      DOUBLE PRECISION DUDX
*
      .. Local Arrays ..
      DOUBLE PRECISION UE(2,1)
*
      .. External Subroutines ..
      EXTERNAL        EXACT
*
      .. Executable Statements ..
      IF (IBND.EQ.0) THEN
          CALL EXACT(T,UE,NPDE,X(1),1)
          G(1) = U(1,1) + U(2,1) - UE(1,1) - UE(2,1)
          DUDX = (U(1,2)-U(2,2)-U(1,1)+U(2,1))/(X(2)-X(1))
          G(2) = VDOT(1) - DUDX
      ELSE
          CALL EXACT(T,UE,NPDE,X(NPTS),1)
          G(1) = U(1,NPTS) - U(2,NPTS) - UE(1,1) + UE(2,1)
          DUDX = (U(1,NPTS)+U(2,NPTS)-U(1,NPTS-1)-U(2,NPTS-1))/(X(NPTS)
+           -X(NPTS-1))
          G(2) = VDOT(2) + 3.0D0*DUDX
      END IF
      RETURN
      END
*
      SUBROUTINE NMFLX1(NPDE,T,X,NCODE,V,ULEFT,URIGHT,FLUX,IRES)
*
      .. Scalar Arguments ..
      DOUBLE PRECISION T, X
      INTEGER          IRES, NCODE, NPDE
*
      .. Array Arguments ..

```

```

      DOUBLE PRECISION  FLUX(NPDE), ULEFT(NPDE), URIGHT(NPDE), V(*)
*      .. Executable Statements ..
      FLUX(1) = 0.5D0*(3.0D0*ULEFT(1)-URIGHT(1)+3.0D0*ULEFT(2)+URIGHT(2)
+      )
      FLUX(2) = 0.5D0*(3.0D0*ULEFT(1)+URIGHT(1)+3.0D0*ULEFT(2)-URIGHT(2)
+      )
      RETURN
      END

*
SUBROUTINE ODEDEF(NPDE,T,NCODE,V,VDOT,NXI,XI,UCP,UCPX,UCPT,F,IRES)
*      .. Scalar Arguments ..
      DOUBLE PRECISION  T
      INTEGER            IRES, NCODE, NPDE, NXI
*      .. Array Arguments ..
      DOUBLE PRECISION  F(*), UCP(NPDE,*), UCPT(NPDE,*), UCPX(NPDE,*),
+      V(*), VDOT(*), XI(*)
*      .. Executable Statements ..
      IF (IRES.EQ.-1) THEN
          F(1) = 0.0D0
          F(2) = 0.0D0
      ELSE
          F(1) = V(1) - UCP(1,1) + UCP(2,1)
          F(2) = V(2) - UCP(1,2) - UCP(2,2)
      END IF
      RETURN
      END

*
SUBROUTINE EXACT(T,U,NPDE,X,NPTS)
*      Exact solution (for comparison and b.c. purposes)
*      .. Scalar Arguments ..
      DOUBLE PRECISION T
      INTEGER            NPDE, NPTS
*      .. Array Arguments ..
      DOUBLE PRECISION U(NPDE,*), X(*)
*      .. Scalars in Common ..
      DOUBLE PRECISION P
*      .. Local Scalars ..
      DOUBLE PRECISION F, G, PI, PI2
      INTEGER            I
*      .. External Functions ..
      DOUBLE PRECISION X01AAF
      EXTERNAL           X01AAF
*      .. Intrinsic Functions ..
      INTRINSIC          COS, EXP, SIN
*      .. Executable Statements ..
      F = 0.0D0
      PI = X01AAF(F)
      PI2 = 2.0D0*PI
      DO 20 I = 1, NPTS
          F = EXP(PI*(X(I)-3.0D0*T))*SIN(PI2*(X(I)-3.0D0*T))
          G = EXP(-PI2*(X(I)+T))*COS(PI2*(X(I)+T))
          U(1,I) = F + G
          U(2,I) = F - G
20 CONTINUE
      RETURN
      END

*
SUBROUTINE EX2
*      .. Parameters ..
      INTEGER            NIN, NOUT
      PARAMETER          (NIN=5,NOUT=6)
      INTEGER            NPDE, NPTS, NCODE, NXI, NEQN, NIW, NWKRES,
+      LENODE, MLU, NW
      PARAMETER          (NPDE=3,NPTS=141,NCODE=0,NXI=0,
+      NEQN=NPDE*NPTS+NCODE,NIW=NEQN+24,
+      NWKRES=NPDE*(2*NPTS+3*NPDE+32)+7*NPTS+4,
+      LENODE=9*NEQN+50,MLU=3*NPDE-1,NW=(3*MLU+1)
+      *NEQN+NWKRES+LENODE)
*      .. Scalars in Common ..
      DOUBLE PRECISION  ELO, ERO, GAMMA, RLO, RRO
*      .. Local Scalars ..

```

```

DOUBLE PRECISION D, P, TOUT, TS, V
INTEGER          I, IFAIL, IND, IT, ITASK, ITOL, ITRACE, K
CHARACTER        LAOPT, NORM
*
.. Local Arrays ..
DOUBLE PRECISION ALGOPT(30), ATOL(1), RTOL(1), U(NPDE,NPTS),
+                UE(3,8), W(NW), X(NPTS), XI(1)
INTEGER          IW(NIW)
*
.. External Subroutines ..
EXTERNAL         BNDRY2, D03PEK, D03PLF, D03PLP, NMFLX2, UVINIT
*
.. Common blocks ..
COMMON          /INIT/ELO, ERO, RLO, RRO
COMMON          /PARAMS/GAMMA
*
.. Executable Statements ..
WRITE (NOUT,*)
WRITE (NOUT,*)
WRITE (NOUT,*) 'Example 2'
WRITE (NOUT,*)
*
Skip heading in data file
READ (NIN,*)

*
*
Problem parameters
GAMMA = 1.4D0
ELO = 2.5D0
ERO = 0.25D0
RLO = 1.0D0
RRO = 0.125D0
ITRACE = 0
ITOL = 1
NORM = '2'
ATOL(1) = 0.5D-2
RTOL(1) = 0.5D-3
WRITE (NOUT,99994) GAMMA, ELO, ERO, RLO, RRO
WRITE (NOUT,99996) NPTS, ATOL, RTOL

*
*
Initialise mesh
*
DO 20 I = 1, NPTS
    X(I) = 1.0D0*(I-1.0D0)/(NPTS-1.0D0)
20 CONTINUE

*
*
Initial values of variables
CALL UVINIT(NPDE,NPTS,X,U)

*
XI(1) = 0.0D0
LAOPT = 'B'
IND = 0
ITASK = 1

*
DO 40 I = 1, 30
    ALGOPT(I) = 0.0D0
40 CONTINUE

*
Theta integration
ALGOPT(1) = 2.0D0
ALGOPT(6) = 2.0D0
ALGOPT(7) = 2.0D0
*
Max. time step
ALGOPT(13) = 0.5D-2

*
TS = 0.0D0
WRITE (NOUT,99998)
DO 100 IT = 1, 2
    TOUT = IT*0.1D0
    IFAIL = 0

*
CALL D03PLF(NPDE,TS,TOUT,D03PLP,NMFLX2,BNDRY2,U,NPTS,X,NCODE,
+          D03PEK,NXI,XI,NEQN,RTOL,ATOL,ITOL,NORM,LAOPT,
+          ALGOPT,W,NW,IW,NIW,ITASK,ITRACE,IND,IFAIL)

*
WRITE (NOUT,99997) TS

*
*
Read exact data at output points ..

```

```

      READ (NIN,*)
      DO 60 I = 1, 8
        READ (NIN,99999) UE(1,I), UE(2,I), UE(3,I)
60    CONTINUE
*
*    Calculate density, velocity and pressure ..
      K = 0
      DO 80 I = 29, NPTS - 14, 14
        D = U(1,I)
        V = U(2,I)/D
        P = D*(GAMMA-1.0D0)*(U(3,I)/D-0.5D0*V**2)
        K = K + 1
        WRITE (NOUT,99993) X(I), D, UE(1,K), V, UE(2,K), P, UE(3,K)
80    CONTINUE
100  CONTINUE
*
      WRITE (NOUT,99995) IW(1), IW(2), IW(3), IW(5)
      RETURN
*
99999 FORMAT (3(1X,F6.4))
99998 FORMAT (4X,'X',4X,'APPROX D',1X,'EXACT D',2X,'APPROX V',1X,'EXAC',
+           'T V',2X,'APPROX P',1X,'EXACT P')
99997 FORMAT (/ ' T = ',F6.3,/)
99996 FORMAT (/ ' NPTS = ',I4,' ATOL = ',E10.3,' RTOL = ',E10.3,/)
99995 FORMAT (/ ' Number of integration steps in time = ',I6,/' Number ',
+           'of function evaluations = ',I6,/' Number of Jacobian ',
+           'evaluations = ',I6,/' Number of iterations = ',I6)
99994 FORMAT (/ ' GAMMA = ',F6.3,' ELO = ',F6.3,' ERO = ',F6.3,' RLO = ',
+           F6.3,' RRO = ',F6.3)
99993 FORMAT (1X,F6.4,6(3X,F6.4))
      END
*
      SUBROUTINE UVINIT(NPDE,NPTS,X,U)
*    .. Scalar Arguments ..
      INTEGER          NPDE, NPTS
*    .. Array Arguments ..
      DOUBLE PRECISION U(NPDE,NPTS), X(NPTS)
*    .. Scalars in Common ..
      DOUBLE PRECISION ELO, ERO, RLO, RRO
*    .. Local Scalars ..
      INTEGER          I
*    .. Common blocks ..
      COMMON           /INIT/ELO, ERO, RLO, RRO
*    .. Executable Statements ..
      DO 20 I = 1, NPTS
        IF (X(I).LT.0.5D0) THEN
          U(1,I) = RLO
          U(2,I) = 0.0D0
          U(3,I) = ELO
        ELSE IF (X(I).EQ.0.5D0) THEN
          U(1,I) = 0.5D0*(RLO+RRO)
          U(2,I) = 0.0D0
          U(3,I) = 0.5D0*(ELO+ERO)
        ELSE
          U(1,I) = RRO
          U(2,I) = 0.0D0
          U(3,I) = ERO
        END IF
20    CONTINUE
      RETURN
      END
*
      SUBROUTINE BNDRY2(NPDE,NPTS,T,X,U,NCODE,V,VDOT,IBND,G,IRES)
*    .. Scalar Arguments ..
      DOUBLE PRECISION T
      INTEGER          IBND, IRES, NCODE, NPDE, NPTS
*    .. Array Arguments ..
      DOUBLE PRECISION G(NPDE), U(NPDE,NPTS), V(*), VDOT(*), X(NPTS)
*    .. Scalars in Common ..
      DOUBLE PRECISION ELO, ERO, RLO, RRO
*    .. Common blocks ..

```

```

COMMON          /INIT/ELO, ERO, RLO, RRO
*
.. Executable Statements ..
IF (IBND.EQ.0) THEN
  G(1) = U(1,1) - RLO
  G(2) = U(2,1)
  G(3) = U(3,1) - ELO
ELSE
  G(1) = U(1,NPTS) - RRO
  G(2) = U(2,NPTS)
  G(3) = U(3,NPTS) - ERO
END IF
RETURN
END

*
SUBROUTINE NMFLX2(NPDE,T,X,NCODE,V,ULEFT,URIGHT,FLUX,IRES)
*
.. Scalar Arguments ..
DOUBLE PRECISION T, X
INTEGER          IRES, NCODE, NPDE
*
.. Array Arguments ..
DOUBLE PRECISION FLUX(NPDE), ULEFT(NPDE), URIGHT(NPDE), V(*)
*
.. Scalars in Common ..
DOUBLE PRECISION GAMMA
*
.. Local Scalars ..
INTEGER          IFAIL
CHARACTER        PATH, SOLVER
*
.. External Subroutines ..
EXTERNAL         D03PUF, D03PVF
*
.. Common blocks ..
COMMON          /PARAMS/GAMMA
*
.. Executable Statements ..
IFAIL = 0
SOLVER = 'R'
IF (SOLVER.EQ.'R') THEN
*
  ROE SCHEME ..
  CALL D03PUF(ULEFT,URIGHT,GAMMA,FLUX,IFAIL)
ELSE
*
  OSHER SCHEME ..
  PATH = 'P'
  CALL D03PVF(ULEFT,URIGHT,GAMMA,PATH,FLUX,IFAIL)
END IF
RETURN
END

```

9.2 Program Data

D03PLF Example Program Data

D, V, P at selected output pts. For T = 0.1:

```

1.0000 0.0000 1.0000
1.0000 0.0000 1.0000
0.8775 0.1527 0.8327
0.4263 0.9275 0.3031
0.2656 0.9275 0.3031
0.1250 0.0000 0.1000
0.1250 0.0000 0.1000
0.1250 0.0000 0.1000

```

For T = 0.2:

```

1.0000 0.0000 1.0000
0.8775 0.1527 0.8327
0.6029 0.5693 0.4925
0.4263 0.9275 0.3031
0.4263 0.9275 0.3031
0.2656 0.9275 0.3031
0.2656 0.9275 0.3031
0.1250 0.0000 0.1000

```

9.3 Program Results

D03PLF Example Program Results

Example 1

NPTS = 141 ATOL = 0.100E-04 RTOL = 0.250E-03

T = 0.500	X	Approx U1	Exact U1	Approx U2	Exact U2
	0.0000	-0.0432	-0.0432	0.0432	0.0432
	0.1429	-0.0221	-0.0220	0.0001	-0.0000
	0.2857	-0.0200	-0.0199	-0.0232	-0.0231
	0.4286	-0.0123	-0.0123	-0.0176	-0.0176
	0.5714	0.0247	0.0245	0.0225	0.0224
	0.7143	0.0833	0.0827	0.0831	0.0825
	0.8571	0.1041	0.1036	0.1043	0.1039
	1.0000	-0.0007	-0.0001	-0.0006	0.0001

Number of integration steps in time = 161
 Number of function evaluations = 1172
 Number of Jacobian evaluations = 17
 Number of iterations = 421

Example 2

GAMMA = 1.400 ELO = 2.500 ERO = 0.250 RLO = 1.000 RRO = 0.125

NPTS = 141 ATOL = 0.500E-02 RTOL = 0.500E-03

X	APPROX D	EXACT D	APPROX V	EXACT V	APPROX P	EXACT P
T = 0.100						
0.2000	1.0000	1.0000	-.0000	0.0000	1.0000	1.0000
0.3000	1.0000	1.0000	-.0000	0.0000	1.0000	1.0000
0.4000	0.8668	0.8775	0.1665	0.1527	0.8188	0.8327
0.5000	0.4299	0.4263	0.9182	0.9275	0.3071	0.3031
0.6000	0.2969	0.2656	0.9274	0.9275	0.3028	0.3031
0.7000	0.1250	0.1250	0.0000	0.0000	0.1000	0.1000
0.8000	0.1250	0.1250	-.0000	0.0000	0.1000	0.1000
0.9000	0.1250	0.1250	-.0000	0.0000	0.1000	0.1000

T = 0.200						
0.2000	1.0000	1.0000	-.0000	0.0000	1.0000	1.0000
0.3000	0.8718	0.8775	0.1601	0.1527	0.8253	0.8327
0.4000	0.6113	0.6029	0.5543	0.5693	0.5022	0.4925
0.5000	0.4245	0.4263	0.9314	0.9275	0.3014	0.3031
0.6000	0.4259	0.4263	0.9277	0.9275	0.3030	0.3031
0.7000	0.2772	0.2656	0.9272	0.9275	0.3031	0.3031
0.8000	0.2657	0.2656	0.9276	0.9275	0.3032	0.3031
0.9000	0.1250	0.1250	-.0000	0.0000	0.1000	0.1000

Number of integration steps in time = 170
 Number of function evaluations = 411
 Number of Jacobian evaluations = 1
 Number of iterations = 2

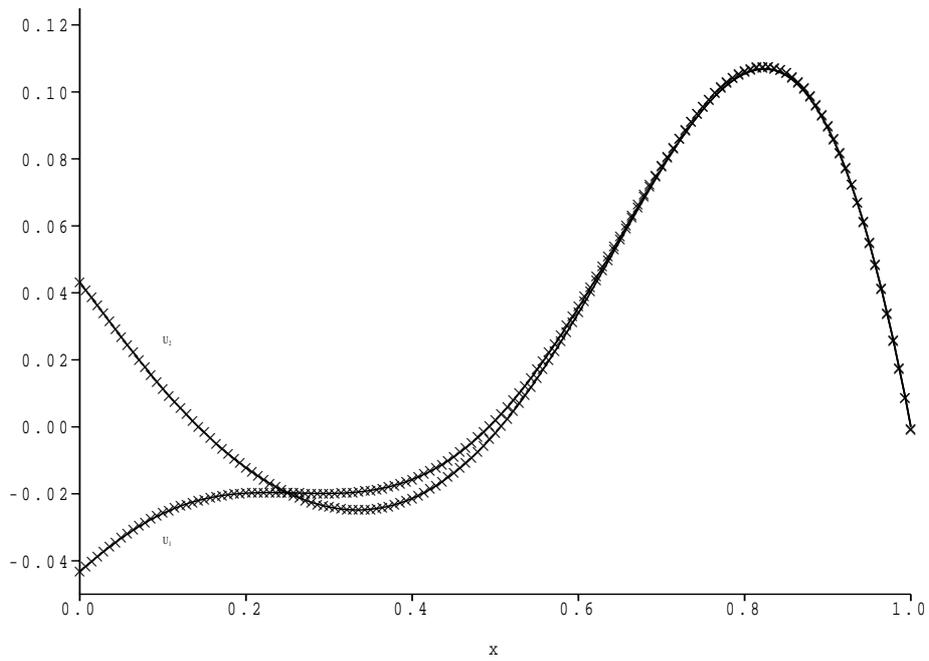


Figure 1
Solution to Example 1

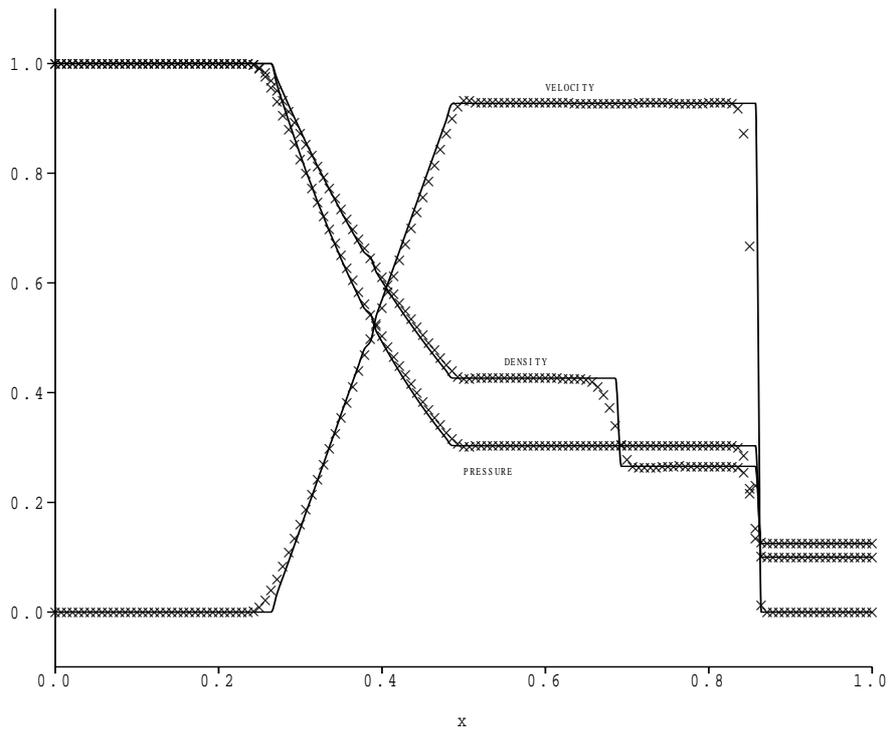


Figure 2
Solution to Example 2